


AC1146



AS-Interface diagnosis module

AS-i Tuner IP67

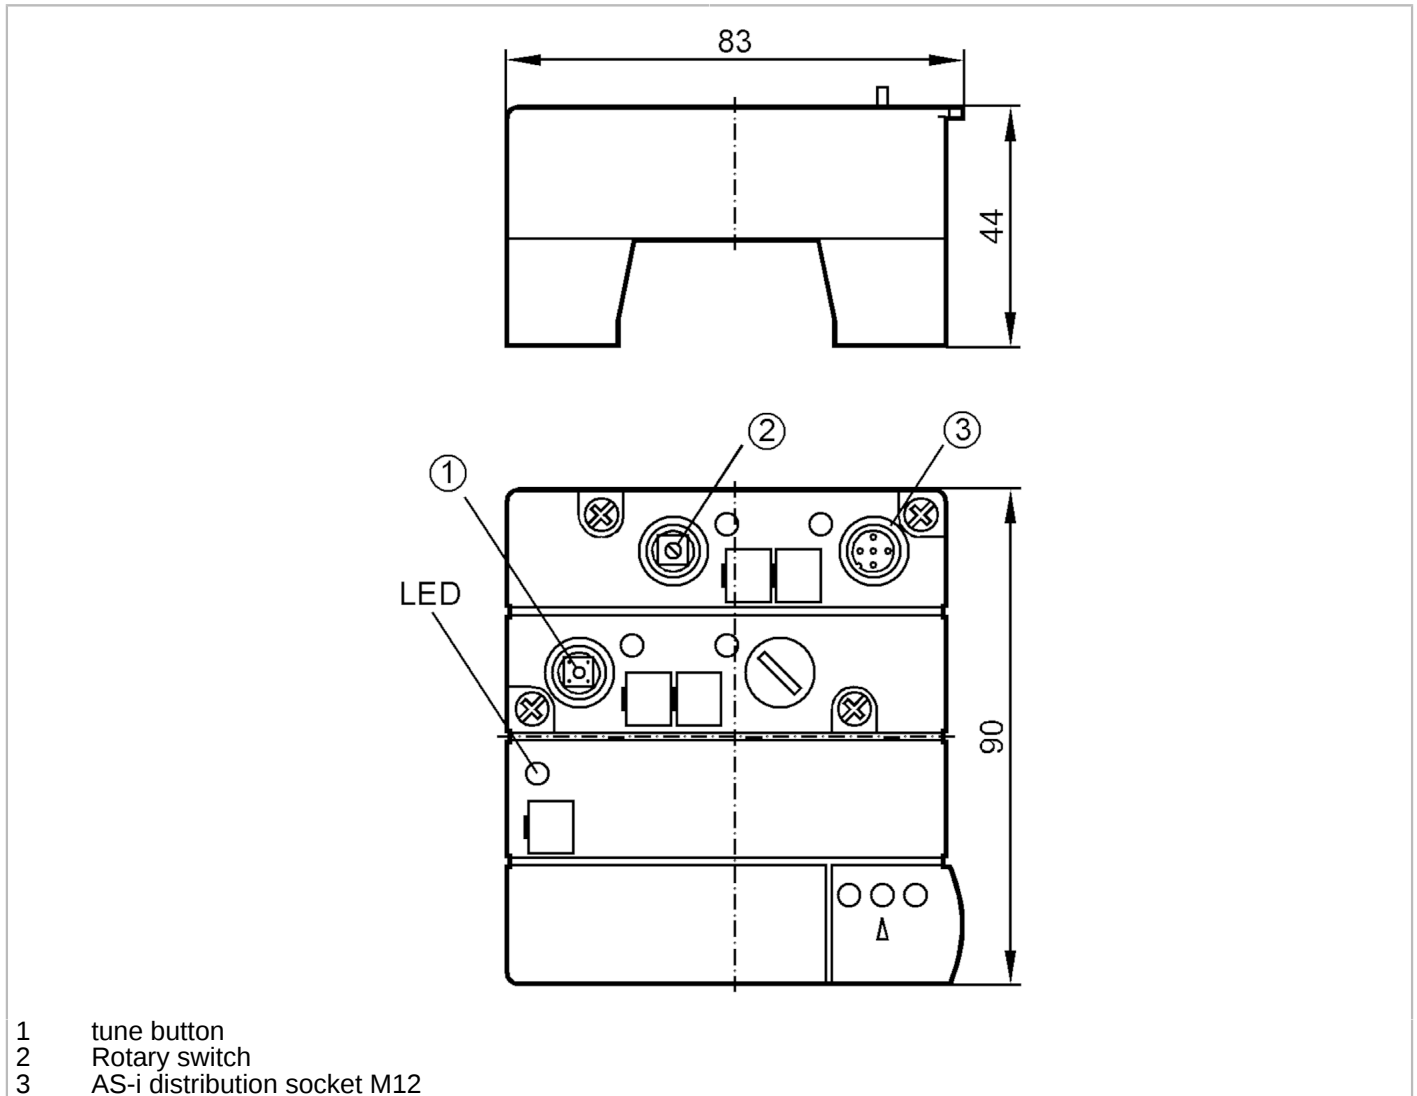


Application		
Application		diagnostic tool for AS-i
Electrical data		
Nominal voltage DC	[V]	26.5...31.6
Max. current consumption from AS-i	[mA]	60
Reverse polarity protection		yes
Undervoltage monitor		yes
Operating conditions		
Ambient temperature	[°C]	0...55
Protection		IP 67
Tests / approvals		
MTTF	[years]	140
AS-i classification		
AS-i certificate pending		yes

AC1146



AS-Interface diagnosis module

AS-i Tuner IP67

Mechanical data		
Weight [g]	203.5	
Material	PBT	
Displays / operating elements		
Display	Power	LED, green
	warning	LED, yellow
	errors	LED, red
Accessories		
Accessories (optional)	Module lower part:, AC5000	
Remarks		
Remarks	no addressing required Current rating of the AS-i distribution socket max. 1 A	
Pack quantity	1 pcs.	
Electrical connection		
contact pins to module lower part, FK:		
Connector: M12		
		
AS-i distribution socket M12		
1	AS-i +	
3	AS-i -	