


AC3227



AS-i fibre optic repeater

SmartL25 AS-i FO-Repeater

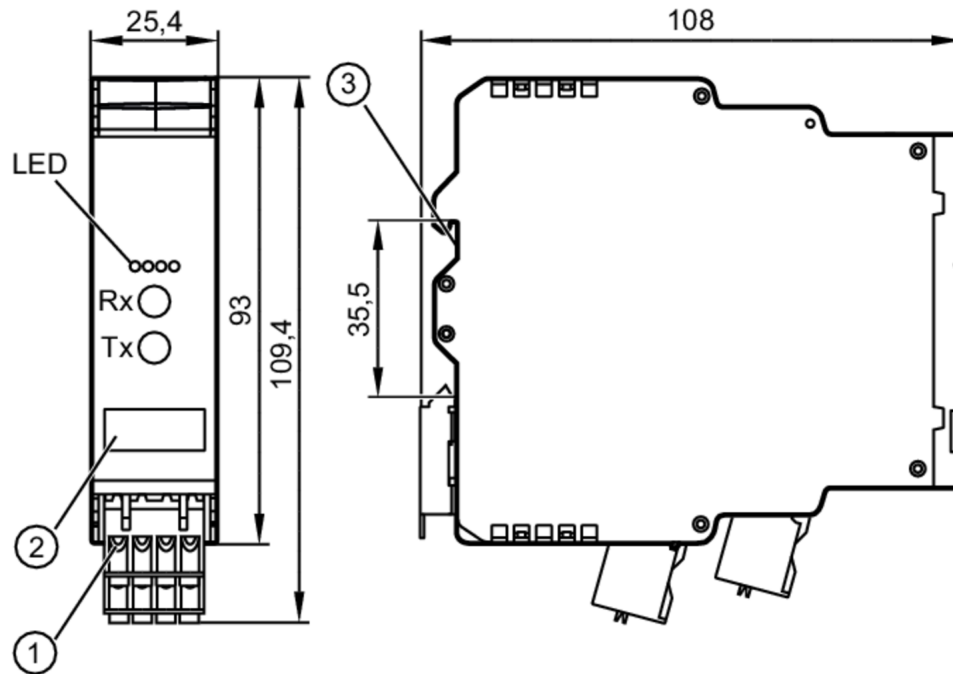

- 1 plug with cage clamp connection
- 2 panel for labelling
- 3 mounting on DIN rail



Application	
Application	Extension of the AS-i network via fibre optics to max. 3200 m
Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	60
Operating conditions	
Ambient temperature [°C]	-25...70
Storage temperature [°C]	-25...75
Max. relative air humidity [%]	90; (non condensing)
Max. height above sea level [m]	2000
Protection	IP 20
Degree of soiling	2
Tests / approvals	
EMC	EN 62026-2
	Ta
	-25...70 °C
UL approval	Enclosure type
	IP20
	voltage supply
	Low Voltage / Limited Energy
	File number UL
	E205959



AC3227



AS-i fibre optic repeater

SmartL25 AS-i FO-Repeater

Mechanical data		
Weight	[g]	162.5
Type of mounting		mounting on DIN rail
Materials		PA 6.6
Displays / operating elements		
Display	operation	1 x LED, green
Accessories		
Items supplied		COMBICON connectors
Remarks		
Remarks		An additional AS-i power supply is required for operation.
Pack quantity		1 pcs.
Electrical connection		
Connection		

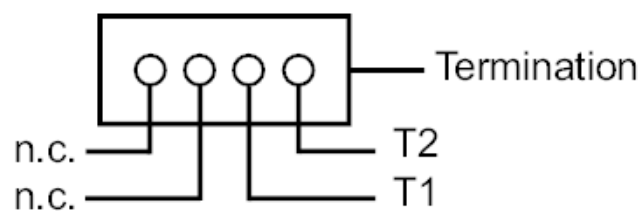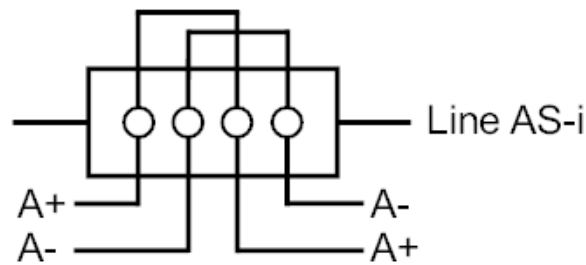

A+	AS-i +
A-	AS-i -
T1	Link for bus termination
T2	Link for bus termination