

TSXAEY1614

analog input module Modicon Premium - 16 I
thermocouple ± 63 mV

Product availability : Stock - Normally stocked in distribution facility

Price* : 5168.10 USD



Main

Range of product	Modicon Premium Automation platform
Product or component type	Analog input module
Analogue input number	16
Analogue input type	Thermocouple thermocouple B Thermocouple thermocouple E Thermocouple thermocouple J Thermocouple thermocouple K Thermocouple thermocouple L Thermocouple thermocouple N Thermocouple thermocouple R Thermocouple thermocouple S Thermocouple thermocouple T Thermocouple thermocouple U Voltage +/- 80 mV
Analog/Digital conversion	16 bits

Complementary

Nominal read cycle time	70 ms per channel
Measurement error	0.8 °C thermocouple E 25 °C 0.9 °C thermocouple J 25 °C 0.9 °C thermocouple L 25 °C 1 °C thermocouple K 25 °C 1 °C thermocouple T 25 °C 1 °C thermocouple U 25 °C 1.1 °C thermocouple N 25 °C 1.2 °C thermocouple E 0...60 °C 1.3 °C thermocouple T 0...60 °C 1.3 °C thermocouple U 0...60 °C 1.4 °C thermocouple J 0...60 °C 1.4 °C thermocouple L 0...60 °C 1.6 °C thermocouple K 0...60 °C 1.7 °C thermocouple N 0...60 °C 2.1 °C thermocouple R 25 °C

	2.2 °C thermocouple S 25 °C 2.4 °C thermocouple R 0...60 °C 2.5 °C thermocouple B 25 °C 3.7 °C thermocouple S 0...60 °C 4 °C thermocouple B 0...60 °C
Isolation between channels and bus	1000 Vrms
Isolation between channels and ground	1000 Vrms
Common mode between channels	250 V AC or 280 V AC
Common mode between channels and earth	250 V DC
Input overvoltage protection	-15...15 V at state 0 250 Ohm -30...30 V at state 1 250 Ohm
Electrical connection	2 connectors SUB-D 25
Overcurrent	-30...30 mA at state 1 250 kOhm
Marking	CE
Current consumption	300 mA 5 V DC
Module format	Standard
Product weight	0.77 lb(US) (0.35 kg)

Environment

Standards	IEC 1131 NFC 42-330 DIN 43710 IEC 751 IEC 584 DIN 43760
Product certifications	DNV RMRS GL ABS RINA BV LR
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	00785901374916
Nbr. of units in pkg.	1
Package weight(Lbs)	0.9899999999999999
Returnability	N
Country of origin	FR

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0746 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold

Reference not containing SVHC above the threshold


Product end of life instructions	Need no specific recycling operations
----------------------------------	---------------------------------------

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting


Dimensions of Modules and Racks

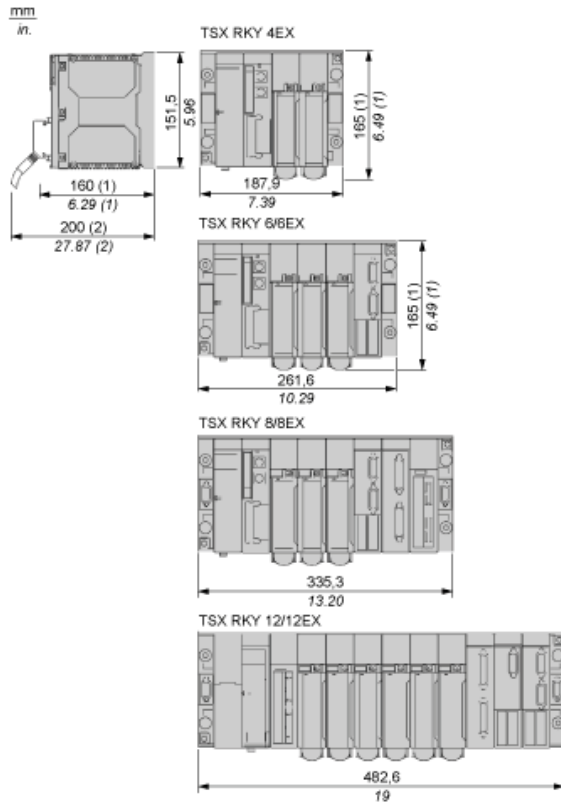

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

Analog Input Module (16-Channel, Voltage/Thermocouple)

Connector Pin Assignment

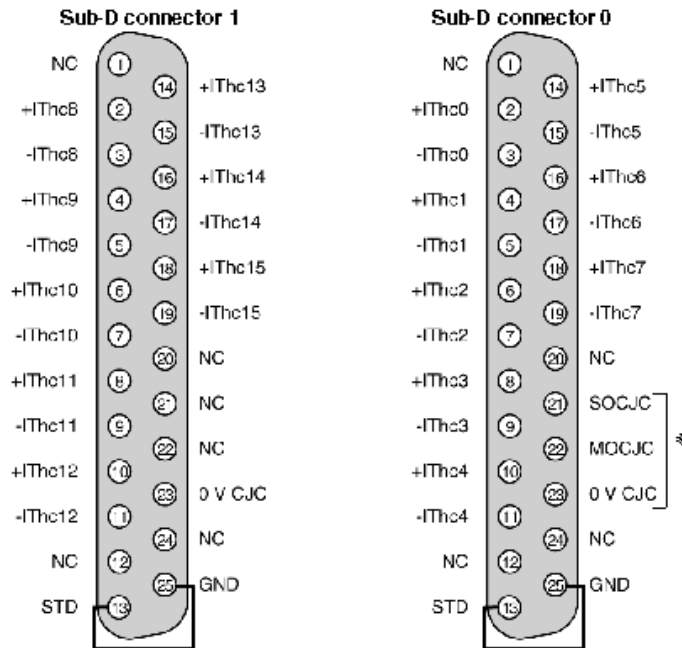

- NC Pin not connected
- +IThcx + input of the thermocouple for channel x
- IThcx - input of the thermocouple for channel x
- SOCJJC Power supply output for internal cold junction compensation by TELEFAST
- MOCJJC Input for internal cold junction compensation measurement by TELEFAST
- STD The strap between pins 13 and 25 enables any removal of the connector to be detected.
- * For internal cold junction compensation

<p>Product Life Status</p>	<p>END OF COMMERCIALIZATION</p>
----------------------------	--