

# TSXAEY800

analog input module with common point Modicon Premium - 8 I multirange

Product availability : Stock - Normally stocked in distribution facility

Price\* : 2211.45 USD



## Main

Range of product	Modicon Premium Automation platform
Product or component type	Analog input module
Input level	High level
Analogue input number	8
Analogue input type	Current 0...20 mA Current 4...20 mA Voltage +/- 10 V Voltage 0...10 V Voltage 0...5 V Voltage 1...5 V
Analog/Digital conversion	12 bits

## Complementary

Nominal read cycle time	27 ms
Fast read cycle time	3 ms + 3 ms x number of channels used
Measurement error	0.15 % of full scale 0...5 V 25 °C 0.15 % of full scale 1...5 V 25 °C 0.19 % of full scale +/- 10 V 25 °C 0.19 % of full scale 0...10 V 25 °C 0.22 % of full scale +/- 10 V 0...60 °C 0.22 % of full scale 0...10 V 0...60 °C 0.22 % of full scale 0...5 V 0...60 °C 0.22 % of full scale 1...5 V 0...60 °C 0.25 % of full scale 0...20 mA 25 °C 0.25 % of full scale 4...20 mA 25 °C 0.41 % of full scale 0...20 mA 0...60 °C 0.41 % of full scale 4...20 mA 0...60 °C
Isolation between channels and bus	1000 Vrms
Isolation between channels and ground	1000 Vrms
Isolation between channels	Common point

Common mode between channels	None
Input overvoltage protection	-15...15 V at state 0 250 Ohm -30...30 V at state 1 250 Ohm
Electrical connection	1 connector SUB-D 25
Overcurrent	-30...30 mA at state 1 250 kOhm
Marking	CE
Current consumption	270 mA 5 V DC
Module format	Standard
Product weight	0.68 lb(US) (0.31 kg)

## Environment

Standards	IEC 1131
Product certifications	LR BV GL DNV RINA ABS RMRS
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

## Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	00785901734550
Nbr. of units in pkg.	1
Package weight(Lbs)	0.940000000000000006
Returnability	Y
Country of origin	FR

## Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0849 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product end of life instructions	Need no specific recycling operations

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting


Dimensions of Modules and Racks

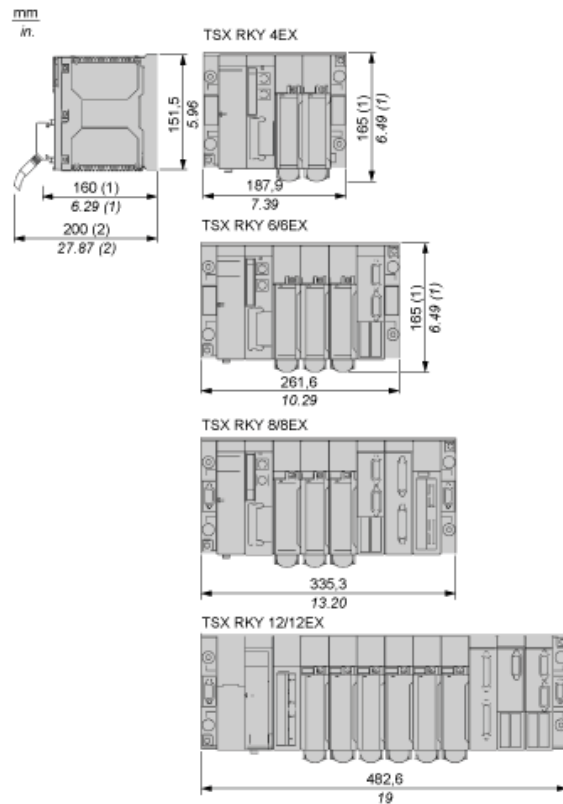

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

Analog Input Module (8-Channel, Voltage/Current)

Connector Pin Assignment

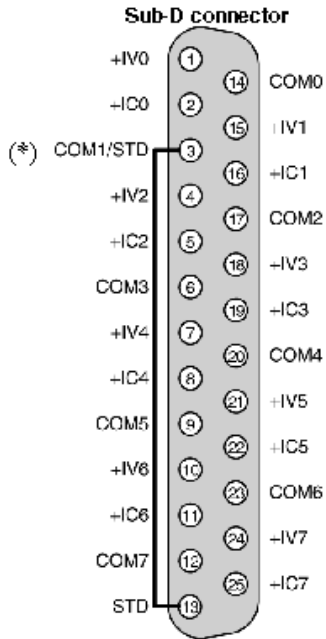

+IVx + pole voltage input for channel x

+ICx + pole current input for channel x

COMx - pole voltage or current input for channel x

(\*) STD The strap between pins 3 and 13 enables any removal of the connector to be detected.

NOTE: The COMx pins are connected internally in the module.