



AS-i Extension Plug Compact Doubling of the cable length to 200 m per AS-Interface segment Degree of protection IP67 Connection directly to AS-i Flat ribbon cable

General technical data		
design of the product		AS-Interface extension plug compact
design of the slave type		no slave integrated
Voltage supply using AS-Interface		Yes
operating voltage acc. to AS-Interface specification	V	26.5 ... 31.6
Status display		none
<ul style="list-style-type: none"> U AS-Interface 		none
Connections/ Terminals		
design of the AS-Interface connection		Direct connection to AS-i ribbon cable
AS interface		
<ul style="list-style-type: none"> Connection Polarity reversal protection total current input max 	mA	yes 15
Ambient conditions		
ambient temperature during operation	°C	-25 ... +70
protection class IP		IP67
Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity



[Miscellaneous](#)

Shipping Approval

other



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


<https://www.siemens.com/ic10>


Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-1MX02>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-1MX02>

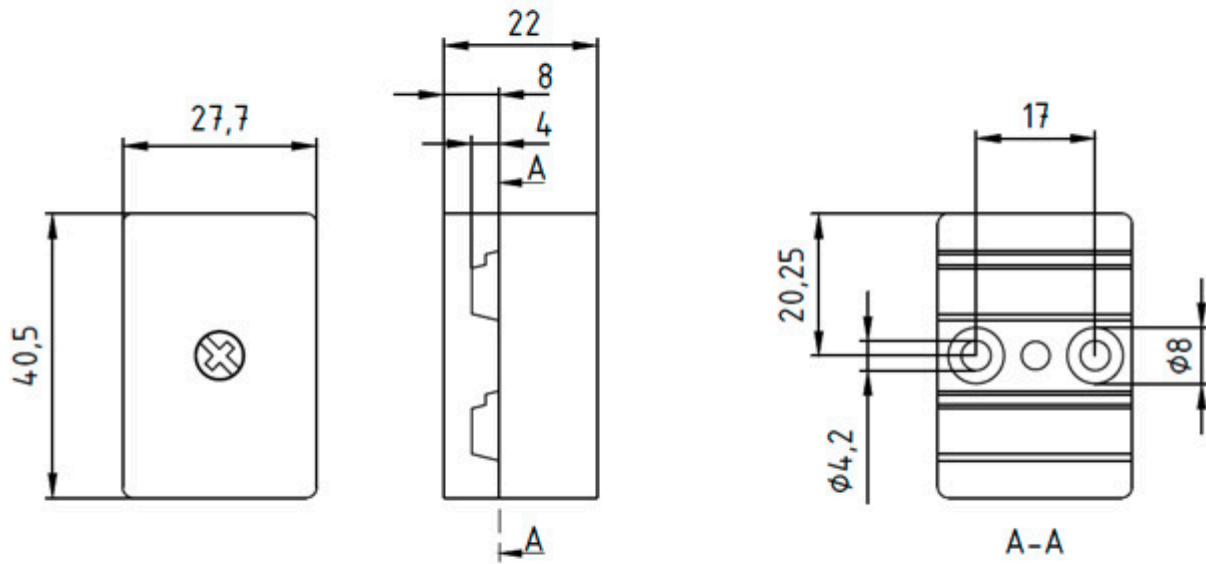

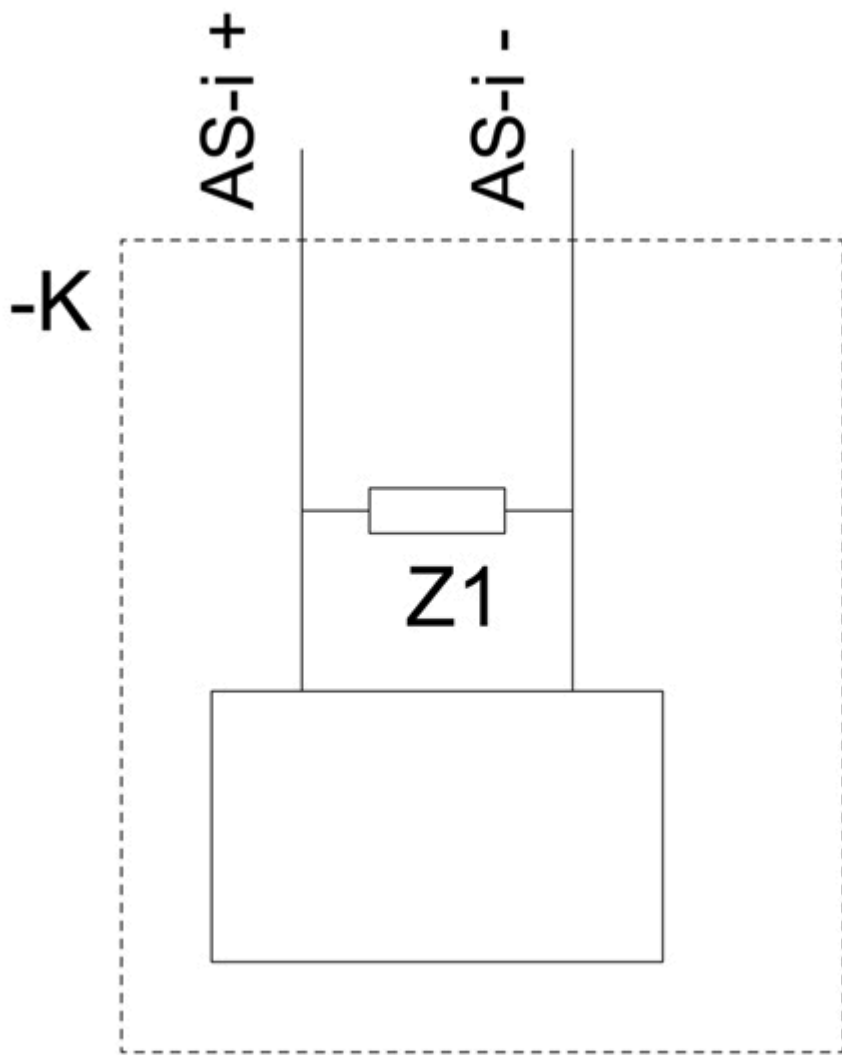

last modified:

5/15/2020 