


# TSXETY210

## Ethernet TCP/IP module - 10 Mbit/s - web server class A10

Product availability : Stock - Normally stocked in distribution facility

Price\* : 6762.00 USD

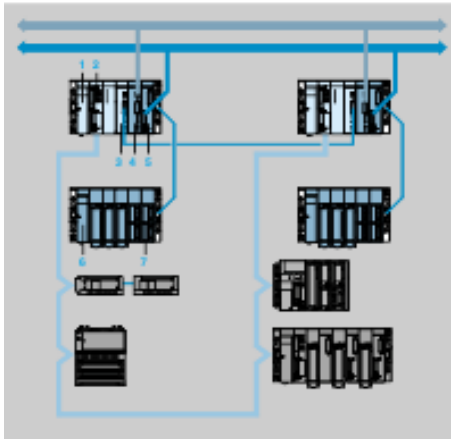

### Main

Range of product	Modicon Premium Automation platform
Product or component type	Ethernet TCP/IP module
Automation architecture	Premium Warm Standby
Physical interface	AUI 100BASE-5 1 AUI cable RJ45 10BASE-T 1 twisted pair
Transmission rate	10 Mbit/s
Communication service	Modbus TCP messaging SNMP agent Uni-TE messaging Common words Ethway/X-Way
Supply	Via the power supply of the rack
Local signalling	1 LED collision detection (COL) 1 LED Ethernet network status (RUN) 1 LED Ethernet port fault (ERR) 1 LED transmission/reception activity (TX/TR)

### Complementary

Communication port protocol	Ethway/X-Way Modbus TCP Uni-Telway
Maximum number of connections	64
Web server	Transparent ready class A10
Marking	CE
Product compatibility	PL7 Pro Unity Pro
Current consumption	1200 mA 5 V DC with remote power supply (AUI) 800 mA 5 V DC without remote power supply (RJ45)
Module format	Standard
Product weight	0.75 lb(US) (0.34 kg)

## Environment

Standards	FM Class 1 Division 2 group B FM Class 1 Division 2 group D FM Class 1 Division 2 group A FM Class 1 Division 2 group C EN 61131-2
Product certifications	UL 508 CSA 1010-1
IP degree of protection	IP20
Ambient air temperature for operation	32...140 °F (0...60 °C)
Relative humidity	10...95 % at 140 °F (60 °C) without condensation

## Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	00785901415381
Nbr. of units in pkg.	1
Package weight(Lbs)	2.2000000000000002
Returnability	N
Country of origin	FR

## Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1040 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product end of life instructions	Need no specific recycling operations

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

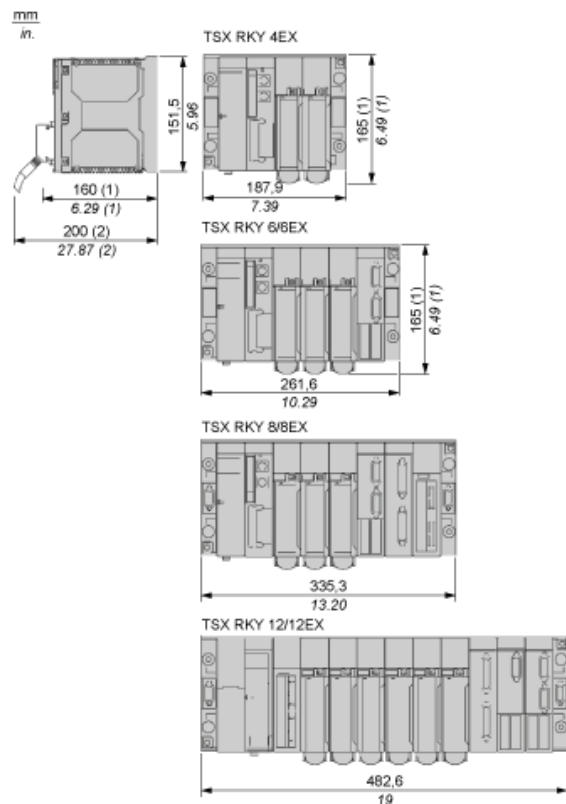

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.