

# Product data sheet

## Characteristics

# TSXFAND2P

## fan module - for TSXRKY racks - 24 V DC

Product availability: Non-Stock - Not normally stocked in distribution facility



### Main

Range of product	Modicon Premium Automation platform
Product or component type	Fan module
Accessory / separate part type	Fan kit
Accessory / separate part designation	Fan kit

### Complementary

Product compatibility	TSXRKY racks
[Us] rated supply voltage	24 V
Supply circuit type	DC
Net Weight	1.10 Lb(US) (0.5 kg)

### Ordering and shipping details

Category	22556 - TSX MICRO, PL7 MICRO & ACCESS
Discount Schedule	PC14
GTIN	00785901734628
Nbr. of units in pkg.	1
Package weight(Lbs)	2.21 Lb(US) (1.00 kg)
Returnability	No
Country of origin	FR

### Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.54 In (9 cm)
Package 1 width	7.09 In (18 cm)
Package 1 Length	10.24 In (26 cm)

## Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------


Ventilation Module

Dimensions

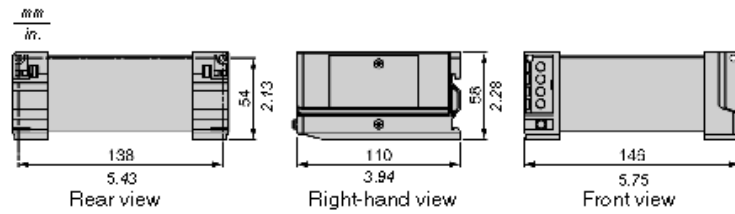

Wiring Diagrams


Connection of the Ventilation Module Power Supply

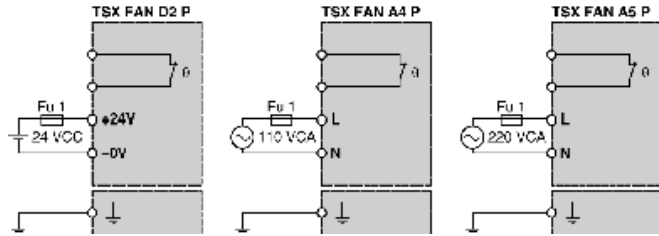


NOTE: When using several ventilation modules of the same type, use a common power supply for all the ventilation modules.

Connection of the Temperature Probe Power Supply

The Temperature probe may be supplied either by a direct current or alternating current and be connected to a LED indicator, a PLC input, etc. .

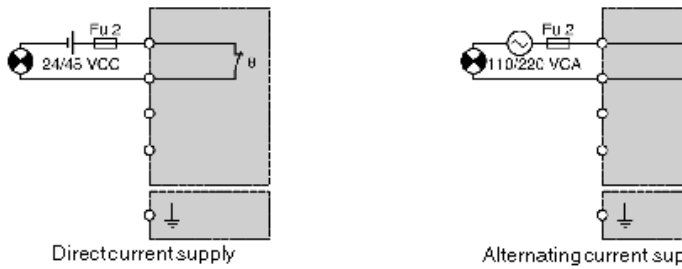

NOTE: When using several ventilation modules, the probe contacts shall be serialized.

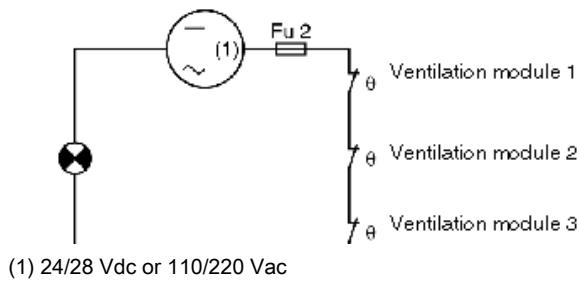

Product Life Status : **Commercialised**